

Rotary Joint(RJ)

SKP

◆ SRJ Series

- SRJ Series are strong against corrosion and impact because of its brass body.
- SRJ Series are easy to install because of its small size and light weight.
- SRJ Series have very low resistance against rotation.
- SRJ Series are complete no-lubrication type.

● How to order

SRJ 4000 A - 04 L

- 1 Rotary Joint
- 2 Body Size
2000 - 1/4
3000 - 3/8
4000 - 3/4
6000 - 1
- 3 Media Fluid
A - Air
W - Water
- 4 Port size
02 - Rc(PT) 1/4 "
03 - Rc(PT) 3/8 "
04 - Rc(PT) 1/2 "
06 - Rc(PT) 3/4 "
10 - Rc(PT) 1 "
- 5 Direction of connecting screw
R - Right
L - Left



SRJ4000A-04R




SRJ2000A-02R

● Specification


Fluid	Air, Water
Max. temperature	80 °C
Max. pressure	0.97MPa [9.9 kgf/cm ²]
Number of Max. rotation	1200 rpm

● Dimensions(mm)

SRJ 2000, 3000

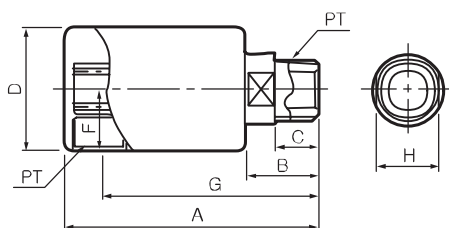

SRJ 4000, 6000

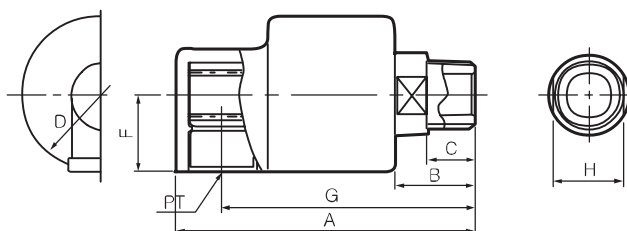

Model	P T	A	B	C	D	F	G	H	Weight(g)
SRJ 2000-01	PT 1/8	90	25	12	40	20	76	19	320
SRJ 2000-02	PT 1/4	93	28	12	40	20	79	19	320
SRJ 3000-03	PT 3/8	94	30	14	40	20	82	19	314
SRJ 4000-04	PT 1/2	117	36	16	55	24	97	25	912
SRJ 5000-06	PT 3/4	124	37	18	61	25	103	32	1,208
SRJ 6000-10	PT 1	141	44	20	74	32	115	38	1,946

SRJ