


Solenoid Operated Directional Valve

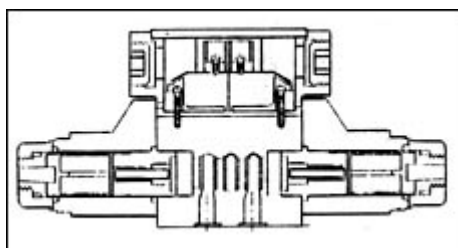

How to Order


DSG - 01 - 3C2 - A2 - N

1 2 3 4 5

1. Model
2. Nominal Size
01: 1/4", CETOP:3, ISO:03, NG:6
03: 3/8", CETOP:5, ISO:05, NG:10
3. Spool type
4. Coil Voltage
A1: AC110V /60Hz
A2: AC220V /60Hz
A3: AC110V /50Hz
A4: AC220V /50Hz
R1: R110V (50/60Hz)
R2: R220V (50/60Hz)
D1: DC12V
D2: DC24V
5. DIN Type
No Symbol: Joint
Box Type

Specification

Model Number		DSG-01		DSG-03	
Spool Type	Model Number	Rated Flow l/min (gpm)	Max. Flow l/min (gpm)	Rated Flow l/min (gpm)	Max. Flow l/min (gpm)
	DSG-3C2	25(6.6)	40(10.5)	50(13.2)	80(21.1)
	DSG-3C4				
	DSG-3C5				
	DSG-3C10				
	DSG-3C60	25(6.6)	35(9.2)	40(10.5)	50(13.2)
	DSG-3C3				
	DSG-2D2	25(6.6)	40(10.5)	50(13.2)	80(21.1)

	DSG-2D3	25(6.6)	35(9.2)	40(10.5)	50(13.2)
	DSG-2B3				
	DSG-2B2	25(6.6)	40(10.5)	45(11.9)	80(21.1)
	DSG-2B8				
Max. Pressure	P.A.B	250 kgf/cm ² (3500psi)			
Max. Back Pressure	T	70-160 kgf/cm ² (1400-2300psi)			
Weight kg (lb)	Single Solenoid	AC: 1.5(3.3)	DC: 1.6(3.5)	AC: 3.3(7.3)	DC: 3.6(7.9)
	Double Solenoid	AC: 1.85(4)	DC: 2(4.4)	AC: 3.9(8.6)	DC: 4.8(10.6)