




3V1-06

## Dimension

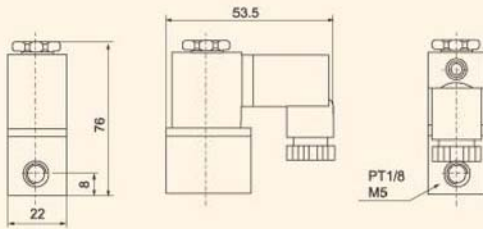

## Solenoid valve 3V1 series

### How to order

3V1	-	06	AC220V
2 / 2 way solenoid valve		Port size M5: M5 <sup>-</sup> 06: 1/8 <sup>-</sup>	Voltage DC12V DC24V AC24V 50/60Hz AC110V 50/60Hz AC220V 50/60Hz AC380V 50/60Hz

### Specification

Model	3V1-M5	3V1-06
Fluid	Air (filtered through 40μ filter element)	
Action	Direct acting type	
Type	Normally closed type	
Effective area (mm <sup>2</sup> )	2.5	
CV Value	0.23	
Port size	1/8 <sup>-</sup>	1/4 <sup>-</sup>
Viscosity limit	Under 20CST	
Operating pressure	0~7.0kgf/cm <sup>2</sup>	
Proof pressure	10kgf/cm <sup>2</sup>	
Ambient & fluid temperature	-5~85°C	
Voltage range	± 10%	
Weight (kg)		
Main parts material	Body	Aluminum alloy
	Seal	NBR