



● TM-08




● TM-06

The High Frequency Valve of TM:

The high frequency valve of TM series have no influence of working pressure and the performance of large flow with low power for adopting the globe valve with structure of balanced pressure type. Any port of No.1,2,3 can be added pressure, act quickly and be used widely such as air blowing, single function cylinder driving, air current branching, pressure choice and vacuum equipments etc. It can be general used in both normal opened and normal closed.

● Ordering Code

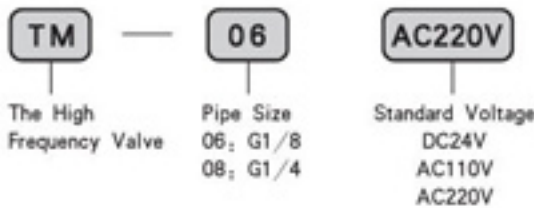

■ Graphics Sign




■ Technical Parameter

Item	Valve Type	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Applicable Temperature
TM-06	2 Positions/ 3 Ports	G1/8	3	Air	0~0.8MPa	Direct Action Type	100Cycles/Sec	No Oil	-5~50°C
TM-08		G1/4	5						

■ Figure Dimension

● TM-06

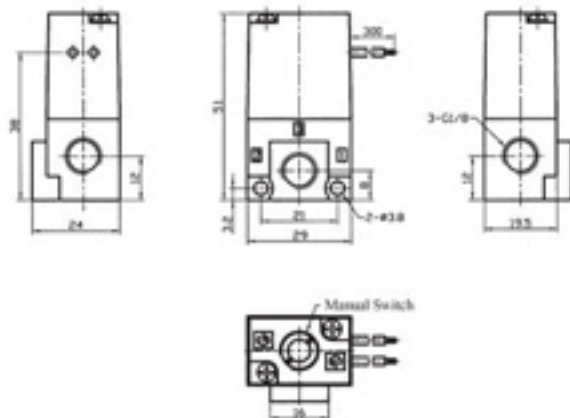

● TM-08

